

Project Name: _____
Date: _____ Note: _____

LED Surface Mount Downlight - SMD Series



Application: Ideal for residential place, office, hallways, utility room and commercial place such as hotel rooms.

Product Description

This integrated LED surface mount down light is a ultra-thin sleek fixture with smooth white trim. It can be installed directly to most round or octagon junction boxes. Designed for commercial or residential use. CCT can be adjusted on field to suit different environment needs.


Certifications



SPECIFICATIONS

Model No.	HY-SMD-R5-10W-3CCT	HY-SMD-R7-15W-3CCT	HY-SMD-R9-18W-3CCT	HY-SMD-R12-24W-3CCT
Wattage	10W	15W	18W	24W
Lumens	650LM	1050 LM	1250LM	1800LM
Size	5"	7"	9"	12"
Rated Input Voltage(V)	120 V 60Hz AC			
CCT	3CCT Selectable: 3000K-4000K-5000K			
Dimming	Triac dimming			
CRI	≥80			
Beam Angle (°)	120°			
Protection Rating	IP20 (For Indoor Use Only)			
CF	0.9			
Color Rendering Index	CRI>80			
Life Span	Lumen Maintenance over 70% @ 50,000+ Hours			
Working Temperature	- 4°F ~ +105°F / -15°C ~ +40°C			
Finish	White			
Certificate	ETL/Energy Star			
Package Info	18.5"X6.1"X12.8"	22.8"X6.1"X15.8"	18.9"X11.4"X9.8"	12.8"X11.4"X13"
PC/ Master Pack	30	30	20	10
Weight	18.1 LB	26.9 LB	25.8 LB	22.3 LB

Accessories inside the box

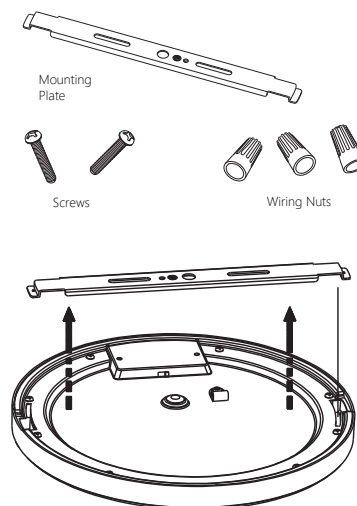


ORDERING CODE DEFINITION

EXAMPLE: HY-SMD-R5-10W-3CCT


Company Code	Product	Size	H	CCT
HY	SMD- Surface Mount Downlight	R5: Round 5"	10W	3CCT: 3CCT Selectable: 3000K-4000K-5000K
		R7: Round 7"	15W	
		R9: Round 9"	18W	
		R12: Round 12"	24W	

PRODUCT DIMENSION

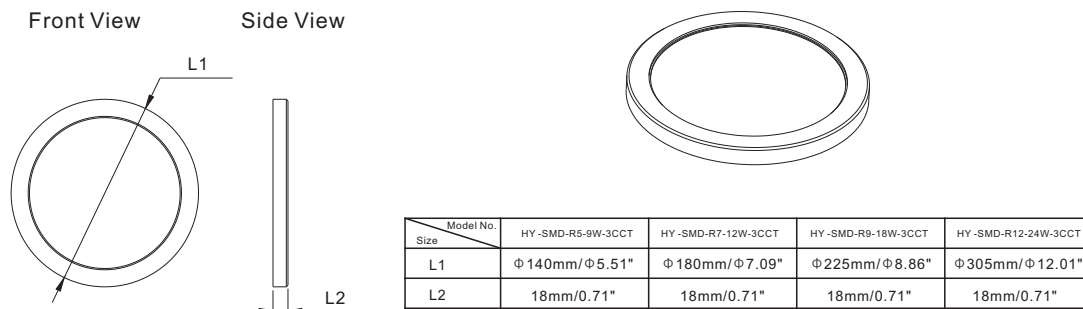


OPERATING GUIDE

1 CCT Adjustable

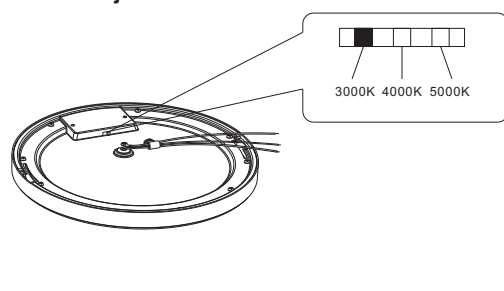

2 Wiring Guide

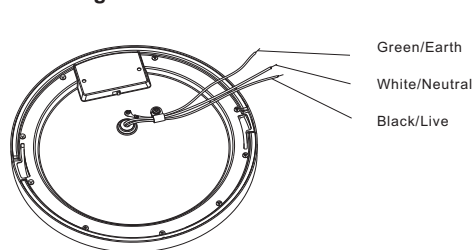

PHOTOMETRIC REPORT

