


Project Name: \_\_\_\_\_  
Date: \_\_\_\_\_ Note: \_\_\_\_\_

### LED RECTANGLE EMERGENCY LIGHT with BATTERY

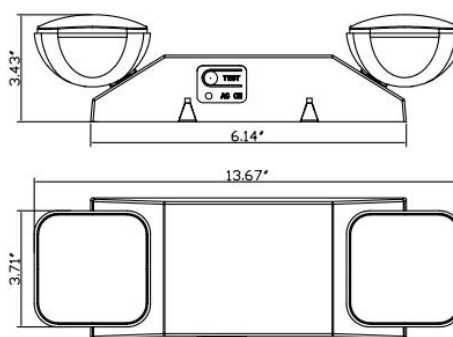

#### FEATURES

- High impact flame retardant high thermos and color stable UL 94-5VA rated polycarbonate
- Easy mount feature for fast installation
- Universal JBOX Mounting Pattern

#### ELECTRICAL

- UL924 Listed
- UL Damp Location Rated
- Dual 120/277 voltage. Optional multi-tap voltage available
- 2x1.2W LAMP HEADS SMD 2835 LEDs
- Built-in 6V700mAH rechargeable Ni-cd battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator

#### SPECIFICATION

|                       |                                     |
|-----------------------|-------------------------------------|
| Model No.             | HY-EML01WH                          |
| Voltage               | 120/277v 60 Hz                      |
| Finish                | White Finish                        |
| Emergency Time        | 90 Minutes with 6.0V Ni-Cad Battery |
| Lumens                | 234 lm                              |
| Wattage               | 3.0W@ 120v; 3.6W@ 277V              |
| Operating Temperature | 32°F ~+104°F / 0°C~+40°C            |
| Package Info          | 14.8x10.3x11.2                      |
| PC/ Master Pack       | 6 PCS                               |
| Weight                | 12 LB                               |