


Project Name: _____
Date: _____ Note: _____

LED Exit Sign with Battery

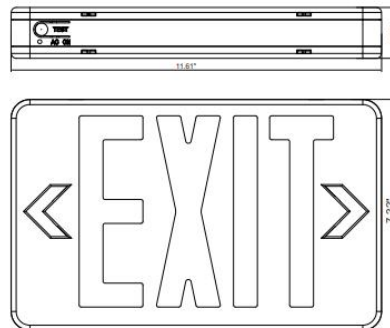

FEATURES

- Injection molded, color stable, high impact UL 94-5VA rated polycarbonate
- Snap-fit construction to enable fast installation
- Single or Double faced
- Universal JBOX Mounting Pattern
- Wall, top or end mounted

ELECTRICAL

- UL924 Listed
- UL Damp Location Rated
- Dual 120/277 voltage. Optional multi-tap voltage available
- Built-in 1.2V700mAH rechargeable Ni-cd battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator

SPECIFICATION

Model No.	HY-EXS01RED
Voltage	120/277v 60 Hz
Finish	White Finish/ Red Sign
Emergency Time	90 Minutes
Battery	1.2V Ni-Cad Battery
Wattage	1.0W@ 120v; 0.85W@ 277V
Operating Temperature	32°F ~ +104°F / 0°C ~ +40°C
Package Info	14.6x12.4x8.3
PC/ Master Pack	6 PCS
Weight	13.9 LB